




Heating Capacity at Different Conditions									
Model	BULG Mono Pro 9.1KW								
Air temp °C	Heating capacity (kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	3.42	3.35	3.29	3.12	2.97				
-20	4.24	4.15	4.07	3.83	3.65	3.43			
-15	4.97	4.86	4.75	4.53	4.42	4.24	4.03	3.78	
-7	6.37	6.18	6.01	5.85	5.64	5.35	4.97	3.88	3.64
-2	7.24	7.13	7.04	6.82	6.61	6.38	6.02	5.18	3.81
2	8.04	7.92	7.82	7.56	7.34	7.05	6.73	6.02	4.23
7	9.10	8.93	8.82	8.54	8.28	8.03	7.85	7.13	5.20
12	9.20	9.01	8.76	8.43	8.18	7.96	7.73	6.85	5.08
20	8.83	8.61	8.40	7.95	7.49	7.21	7.02	6.32	5.43

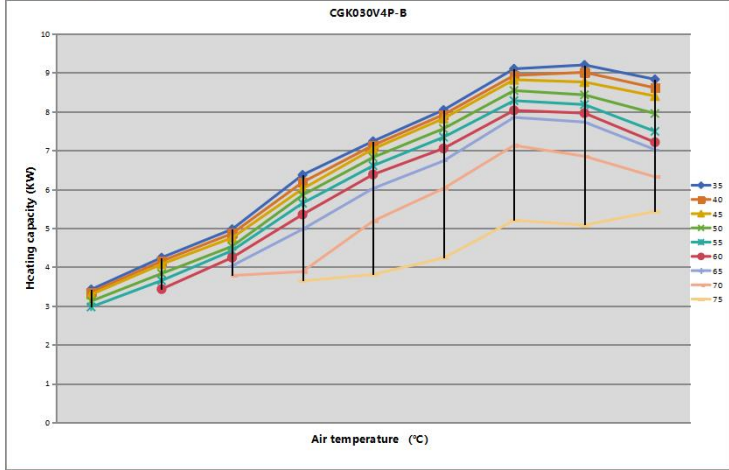


Heating Capacity at Different Conditions									
Model	BULG Mono Pro 12KW								
Air temp °C	Heating capacity (kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	5.03	4.91	4.83	4.74	4.64				
-20	5.94	5.88	5.81	5.65	5.51	4.43			
-15	6.84	6.78	6.71	6.57	6.41	5.38	5.03	4.75	
-7	8.61	8.50	8.40	8.25	8.06	7.03	6.20	5.56	4.81
-2	9.87	9.75	9.65	9.44	9.23	8.75	8.20	7.23	5.04
2	10.97	10.85	10.73	10.49	10.26	9.91	9.62	8.02	5.60
7	12.41	12.26	12.11	11.90	11.71	11.40	11.08	10.63	9.56
12	12.30	12.14	11.99	11.74	11.52	11.18	10.73	10.32	9.82
20	11.83	11.60	11.45	11.20	10.92	10.70	10.30	9.86	9.61

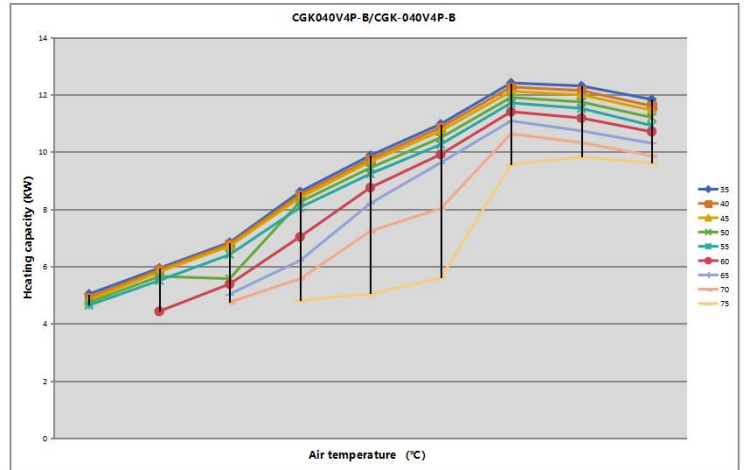


Heating Capacity at Different Conditions									
Model	BULG Mono Pro 9.1KW								
Air temp °C	COP (kW/kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	1.80	1.70	1.59	1.48	1.31				
-20	2.20	2.05	1.92	1.73	1.56	1.35			
-15	2.49	2.30	2.15	1.96	1.79	1.62	1.45	1.19	
-7	3.07	2.82	2.57	2.34	2.15	1.91	1.70	1.21	1.03
-2	3.30	3.05	2.81	2.56	2.32	2.13	1.98	1.50	1.08
2	3.73	3.48	3.17	2.85	2.62	2.35	2.13	1.82	1.16
7	4.20	3.91	3.57	3.21	2.93	2.62	2.30	1.99	1.39
12	5.18	4.61	4.18	3.74	3.33	2.92	2.50	2.25	1.53
20	5.93	5.20	4.69	4.02	3.52	3.08	2.72	2.52	1.85

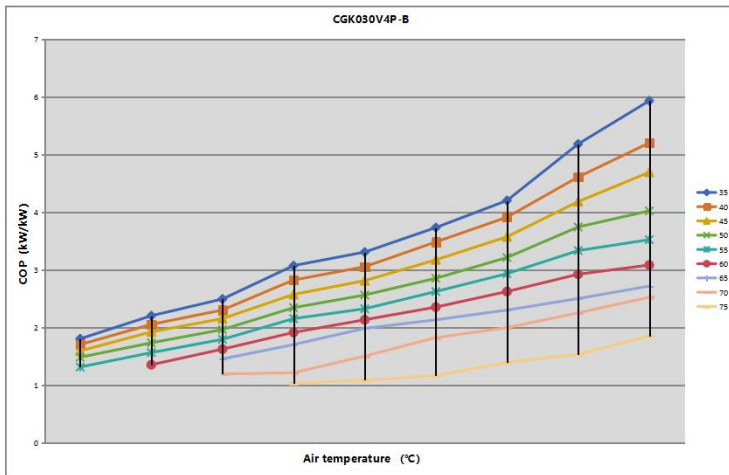


Heating Capacity at Different Conditions									
Model	BULG Mono Pro 12KW								
Air temp °C	COP (kW/kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	2.07	1.93	1.81	1.68	1.55				
-20	2.33	2.20	2.06	1.88	1.73	1.55			
-15	2.57	2.43	2.26	2.12	1.91	1.70	1.50	1.24	
-7	3.05	2.80	2.64	2.44	2.21	1.98	1.75	1.38	1.16
-2	3.26	3.01	2.88	2.61	2.40	2.16	1.96	1.56	1.24
2	3.68	3.42	3.14	2.83	2.60	2.33	2.18	1.78	1.48
7	4.04	3.78	3.43	3.12	2.85	2.58	2.32	2.04	1.73
12	4.81	4.46	4.01	3.61	3.28	2.85	2.58	2.30	2.04
20	5.56	5.13	4.49	3.95	3.60	3.16	2.84	2.63	2.26

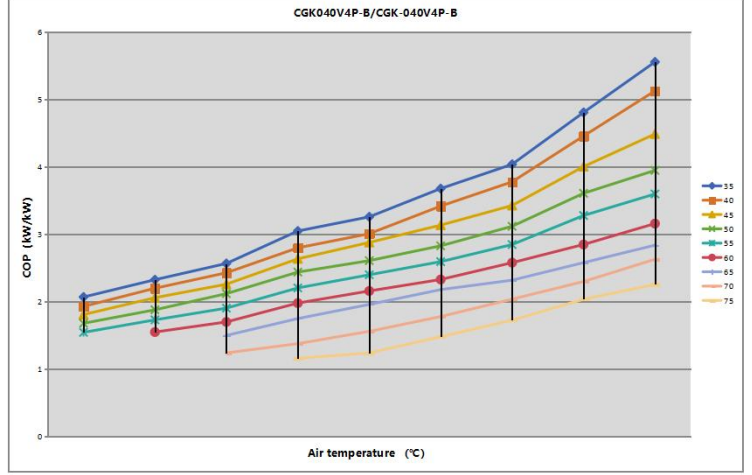


Heating Capacity at Different Conditions									
Model	BULG Mono Pro 15.2KW								
Air temp °C	Heating capacity (kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	6.67	6.52	6.41	6.23	5.98				
-20	7.89	7.73	7.64	7.45	7.30				
-15	9.37	9.13	8.98	8.63	8.48	8.37	8.01	7.86	
-7	11.69	11.17	10.68	10.45	10.21	10.12	10.05	9.29	8.39
-2	12.92	12.56	12.21	11.93	11.69	11.45	10.98	10.15	9.03
2	14.04	13.65	13.27	12.97	12.71	12.45	11.93	11.03	9.82
7	15.29	14.82	14.51	14.18	13.87	13.51	12.98	12.25	11.34
12	16.55	15.98	15.21	14.86	14.41	14.05	13.55	12.83	11.94
20	15.23	14.61	14.05	13.80	13.56	13.33	12.96	12.42	11.67

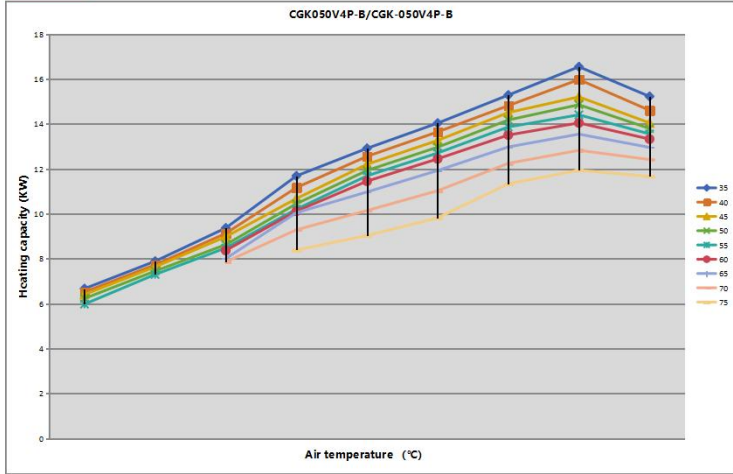

Heating Capacity at Different Conditions									
Model	BULG Mono Pro 6.5KW								
Air temp °C	Heating capacity (kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	2.44	2.40	2.35	2.30	2.27				
-20	2.90	2.88	2.86	2.75	2.69				
-15	3.44	3.38	3.32	3.26	3.19	3.10	2.95	2.78	
-7	4.43	4.37	4.30	4.19	4.09	3.93	3.81	3.67	3.48
-2	5.32	5.29	5.17	5.09	5.00	4.46	4.23	3.99	3.76
2	5.78	5.70	5.62	5.53	5.44	4.85	4.60	4.34	4.09
7	6.67	6.53	6.42	6.28	6.10	5.75	5.48	5.19	4.80
12	6.63	6.49	6.38	6.18	6.00	5.78	5.49	5.25	5.09
20	6.30	6.17	6.00	5.78	5.57	5.25	5.02	4.75	4.55

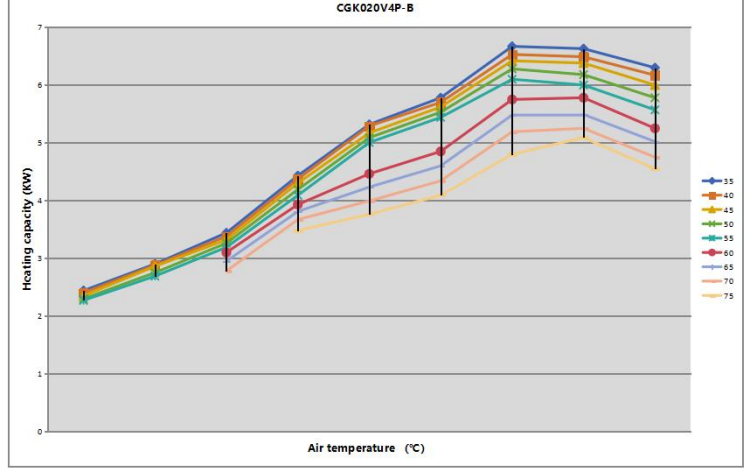

Heating Capacity at Different Conditions									
Model	BULG Mono Pro 15.2KW								
Air temp °C	COP (kW/kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	2.05	1.92	1.81	1.67	1.52				
-20	2.29	2.14	2.03	1.83	1.75				
-15	2.62	2.40	2.26	2.05	1.92	1.79	1.61	1.50	
-7	3.01	2.71	2.48	2.37	2.12	1.96	1.84	1.65	1.41
-2	3.32	2.94	2.59	2.35	2.18	2.06	1.95	1.74	1.56
2	3.43	3.10	2.88	2.61	2.42	2.29	2.08	1.93	1.64
7	3.86	3.53	3.23	2.90	2.69	2.48	2.22	2.05	1.83
12	4.43	4.02	3.68	3.38	2.93	2.64	2.41	2.26	1.98
20	5.13	4.62	4.01	3.75	3.34	2.96	2.68	2.42	2.12

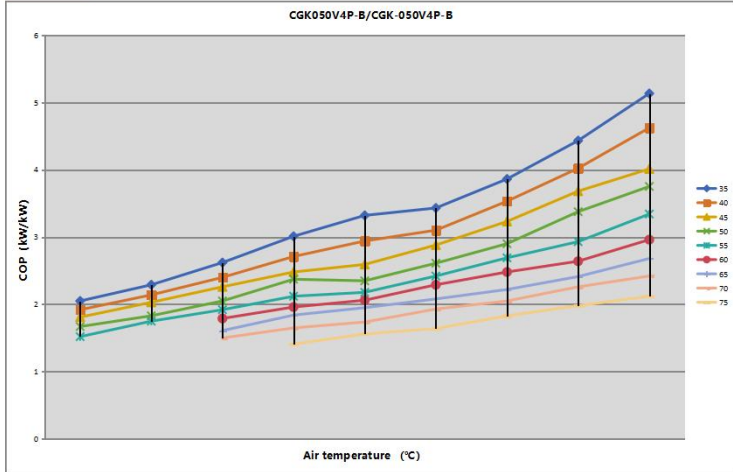

Heating Capacity at Different Conditions									
Model	BULG Mono Pro 6.5KW								
Air temp °C	COP (kW/kW)								
	30/35	35/40	40/45	45/50	50/55	55/60	60/65	65/70	70/75
-25	1.82	1.74	1.67	1.55	1.45				
-20	2.18	2.12	1.96	1.81	1.64				
-15	2.51	2.35	2.19	2.01	1.84	1.69	1.58	1.48	
-7	3.09	2.84	2.66	2.41	2.20	2.02	1.84	1.64	1.45
-2	3.32	3.15	2.95	2.63	2.47	2.26	2.05	1.78	1.60
2	3.89	3.55	3.28	3.01	2.74	2.56	2.28	2.01	1.70
7	4.47	4.02	3.67	3.33	2.99	2.78	2.54	2.29	1.79
12	5.33	4.73	4.29	3.81	3.41	3.10	2.71	2.54	2.16
20	6.17	5.41	4.78	4.15	3.68	3.32	3.02	2.58	2.19

